



INFORMATION
SECURITY

AUDITOR-PRO INTIMUS 9000

Scans serial numbers of
degaussed hard drives

- ▶ Automated report generation
- ▶ Seperate user witness ID



**TOP SECRET
DATA PROTECTION
AND
AUDIT COMPLIANCE**

intimus sets the Standard for audit compliance with its new Auditor-Pro erasure verification system. A specially designed image capture system records the erasure of each hard disk drive or tape processed by the intimus 9000 NATO listed and NSM certified Degausser. Using the included barcode scanner, the user records the serial number of the hard Disk or tape and associates an image of the disk or tape at the time of erasure.

WHY INTIMUS 9000 & AUDITOR-PRO

- NATO listed
- Clean and quiet solution to sanitize magnetic media
- Internal Verification of Magnetic Field
- Single Pass Pulse Technology
- Captures and records images of degaussed hard drives
- Scans serial numbers of degaussed hard drives
- Documents operator ID with up to two witnesses and erasure status of hard drives
- Generates Auditor-Pro erasure report with images for audit compliance
- Creates a secure erasure verification process
- Provides proof data is completely eliminated


FEATURES

- intimus 9000 high-speed, high-powered degausser
- Automated image capture system
- Touch screen control head
- Auditor-Pro erasure report software
- Bar-code scanner and stand
- Stylus
- Auditor-Pro software support for one year
- 50 "Degaussed" labels for erased hard drives



BAR-CODE SCANNER

Scans hard drive serial numbers as you degauss

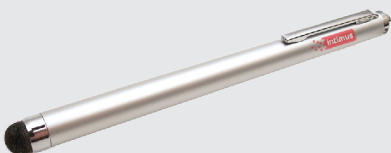


STYLUS

For use with the touch screen control head.


SCREEN SHOTS




Opening screen

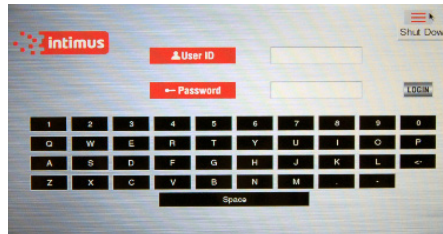


Secure login

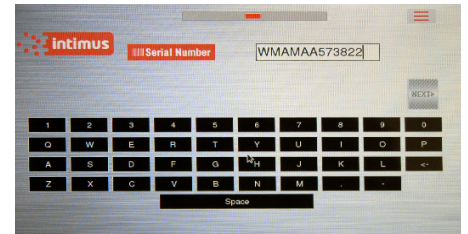

Data collection

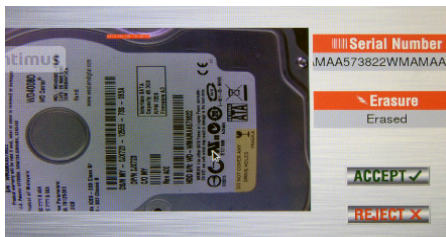

Accept or reject image

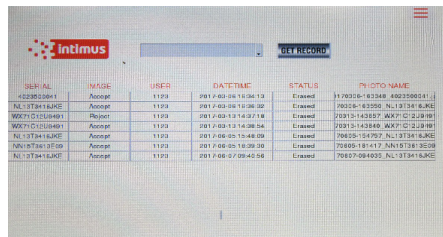

List view of erasure status



Proof of Erasure image



The Auditor-Pro contains the following interfaces:

1. Ethernet Port
2. 4 USB (To connect with: intimus 9000, bar-code scanner, thumbdrive, or optional mouse, and keyboard)
3. HDMI
4. 3.5 mm Image Capture Device interface
5. Power (Connects to standard wall outlet)

SPECIFICATIONS

Storage capacity	16 GB
Power supply	90-240VAC, 47-440 Hz
Power consumption	15W
Fuse	250VAC H3. 15A
Dimensions (HxDxW)	Control head: 6.5 x 9.6 x 2.5 (in.) 167 x 243 x 63 (mm)
	Camera unit: 14.5 x 6.5 x 11.9 (in.) 369 x 165 x 302 (mm)
	Degausser: 18.9 x 12.2 x 22.8 (in.) 480 x 310 x 580 (mm)
Weight	Control head: 4 lbs (1.8 kg)
	Camera unit: 9.7 lbs (4.4 kg) Degausser: 55 lbs (25 kg)
Duty cycle	12 s
Magnetic field	9,300 Oe
Warranty	One-year manufacturer's limited warranty